

# Actuator

02-  
810.001

Distribution by  
Newark



<https://newark.eao.com/component/02-810.001/e...>

Your product:

---



## 02-810.001 Actuator

*Loading . . .*

### PRODUCT RANGE

**Product Status:** Not Recommended for new design

### FRONT

**Front form:** Rectangular

### MOUNTING

**Design:** Flush

**Mounting cut-out:** 21.2 mm x 29.2 mm

**Mounting type:** Panel mounting

### ELECTRICAL CHARACTERISTICS

**Switching voltage and switching current:** 10 VAC ... 55 VAC, 25 mA  
10 VDC ... 75 VDC, 15 mA

**Operating voltage:** 10 - 55 V AC

### MECHANICAL CHARACTERISTICS

**Terminal:** Screw terminal

**Tightening torque:** Fixing sleeve max. 0.2 Nm, Screw terminal 0.8 Nm

**Weight:** 0.059 kg

### ACOUSTICAL CHARACTERISTICS

**Tone frequency:** ca. 2.8 kHz  
**Sound pressure:** 85dB (A) ±8dB at a distance of 0.1m

**AMBIENT CONDITION**

**IP Protection:** IP40 front side, according to DIN EN 60529  
**Operating temperature:** - 20 °C ... + 60 °C  
**Storage temperature:** - 30 °C ... + 70 °C


**CERTIFICATE**

**Conformities:** CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 30 / EU (EMC)  
**REACH:** REACH compliant  
**RoHS:** RoHS compliant

**OTHER**


**Short Description:** Actuator, 21.2 mm x 29.2 mm, Rectangular, Screw terminal  
**Buzzer system:** Electronic non-contacting buzzer with IC oscillator

**Wiring diagrams:**

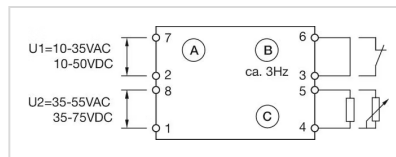

A = Power supply  
 B = Continuous tone (when open) / Intermittent tone (when closed)  
 C = Volume control

**Mounting cut-outs:**

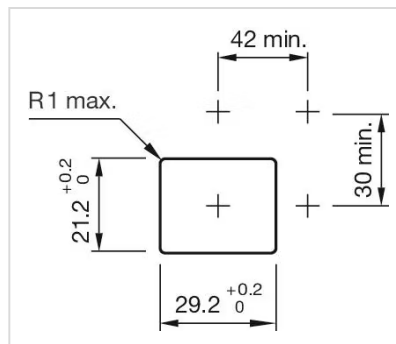

**Dimension drawings:**

