


Single-LED

Distribution by Newark



10-2601.3172S

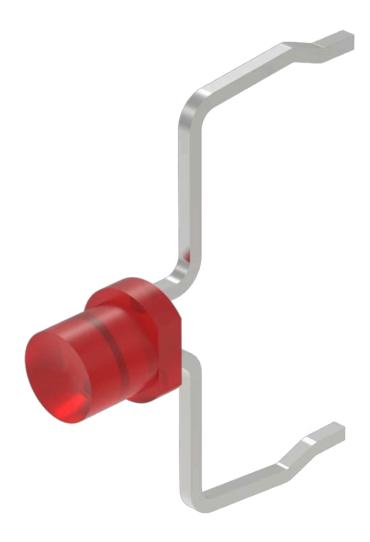





10-2601.3172S Single-LED

OPERATING-/INDICATION PART	OPERAT	'ING-/	INDICA	ATION	I PART
----------------------------	--------	--------	--------	-------	--------

Illumination colour: Red

ELECTRICAL CHARACTERISTICS

Operating voltage: 2 - 6 V DC

Lumi. Intensity: 160 mcd

MECHANICAL CHARACTERISTICS

Weight: 0 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Single-LED, T1 Bi-Pin, Red, 2 - 6 V DC


Kind of illlumination: Single-LED

Hints: The customer has to decide what series resistor shall be used to the LED

Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to

decide what resistor shall be used to the LED

Wiring diagrams:

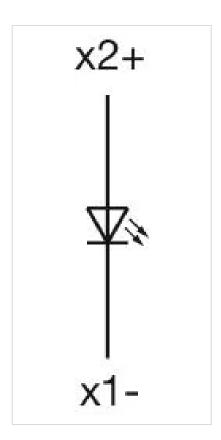

Component layouts:

