


Single-LED

Distribution by Newark



10-2603.3178K

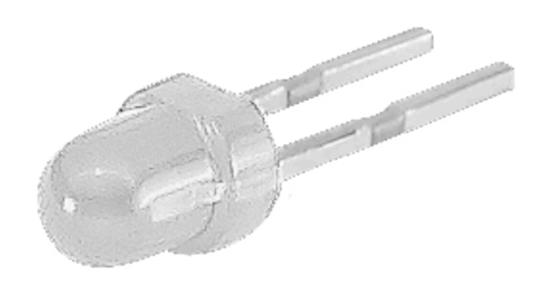





10-2603.3178K Single-LED

OPERATING-/INDICATION PART	OPERAT	'ING-/	INDICA	ATION	I PART
----------------------------	--------	--------	--------	-------	--------

Illumination colour: White

ELECTRICAL CHARACTERISTICS

Operating voltage: 3.2 V DC

Operation current: 20 mA

Lumi. Intensity: 4600 mcd

MECHANICAL CHARACTERISTICS

Weight: 0.001 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Single-LED, T1 Bi-Pin, White, 3.2 V DC

Kind of illlumination: Single-LED

Hints: For LED element fitting information see Application guidelines, LED polarity

Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to

decide what resistor shall be used to the LED

Pins: Max. length: 8 mm

Wiring diagrams:

