

Single-LED

Distribution by Newark



10-2603.3178S







10-2603.3178S Single-LED

OPERATING	-/INDICAT	TION PART
------------------	-----------	-----------

Illumination colour: White

ELECTRICAL CHARACTERISTICS

Operating voltage: 2 - 6 V DC

Lumi. Intensity: 500 mcd

MECHANICAL CHARACTERISTICS

Weight: 0 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Single-LED, T1 Bi-Pin, White, 2 - 6 V DC


Kind of illlumination: Single-LED

Hints: The customer has to decide what series resistor shall be used to the LED

Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to

decide what resistor shall be used to the LED

Wiring diagrams:

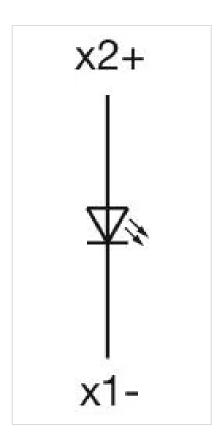

Component layouts:

