

Actuator

14-
060.307

Distribution by
Newark



<https://newark.eao.com/component/14-060.307/e...>

Your product:



14-060.307 Actuator

Loading . .

FRONT

Front form: Round

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens cap material: Plastic

Lens cap optical effect: transparent

Illumination colour: Orange

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V AC/DC

Electrical lifetime: 50 000 h

MECHANICAL CHARACTERISTICS

Terminal: Push-in terminal

Tightening torque: Fixing nut min. 0.8 Nm

Wire cross section:
wire 0.2 ... 1.0 mm²
wire 0.2 ... 0.75 mm² with core and sleeve
wire 0.2 ... 1.0 mm² without core and sleeve

Weight: 0.014 kg

AMBIENT CONDITION

| | |
|-------------------------------|--|
| IP Protection: | IP20 rear side, IP65, IP67, IP69K front side, according to EN IEC 60529 |
| Operating temperature: | - 25 °C ... + 60 °C |
| Storage temperature: | - 40 °C ... + 85 °C |
| Shock resistance: | Max. 300 m / s ² , pulse width 18 ms (sinusoidal EN IEC 60068-2-27) |
| Vibration resistance: | Max. 100 m / s ² from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6) |
| Climate resistance: | Damp heat, steady: 56 days, + 40 °C/93 % relative humidity, according to EN IEC 60068-2-78 Rapid change of temperature: 5 cycles, - 40 °C ... + 85 °C, as per EN IEC 60068-2-14 |

CERTIFICATE


| | |
|----------------------|-----------------|
| Approbations: | UL |
| Conformities: | CE, UKCA |
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |

OTHER

| | |
|------------------------------|--|
| Short Description: | Actuator, Ø 22.3 mm, Round, Push-in terminal, Orange |
| Kind of illumination: | Single-LED |
| Housing colour: | Black |
| Housing material: | Plastic |
| Wiring diagrams: | |



Mounting cut-outs:

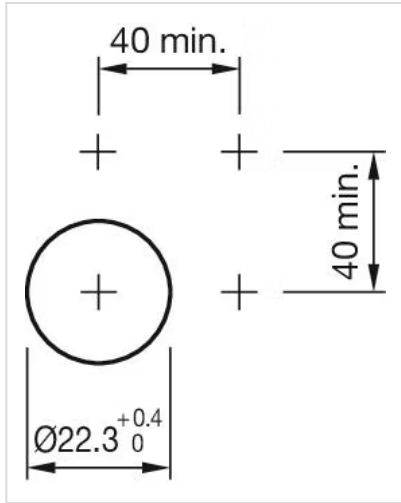

Dimension drawings:

