

Your Expert Partner for Human Machine Interfaces

## Actuator

18-060.0054L







https://newark.eao.com/p/18-060.0054L

Your product:



# 18-060.0054L Actuator

**PRODUCT RANGE** 

Phase-out
Ø 19 mm
Round
Black
Plastic

#### MOUNTING

Design:	Flush
Mounting type:	Panel mounting

#### **OPERATING-/INDICATION PART**

Lens colour:	Yellow
Lens material:	Plastic
Lens illumination:	Illuminated
Lens shape:	Flush
Lens optics:	translucent
Illumination colour:	White

#### **ELECTRICAL CHARACTERISTICS**


Operating voltage:

### **MECHANICAL CHARACTERISTICS**

Terminal:

Weight:	0.002 kg
AMBIENT CONDITION	
Operating temperature:	– 25 °C + 65 °C
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
	Actuator (1.10 mm, Fluck, Illuminated Vallau, Plastic translupant, Pound, Plast
Short Description:	Actuator, Ø 19 mm, Flush, Illuminated, Yellow, Plastic, translucent, Round, Black, Plastic, Soldering terminal, White
Dimension:	Ø 13.8 mm
Product attributes:	Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED
Wiring diagrams:	
	T .


Soldering terminal

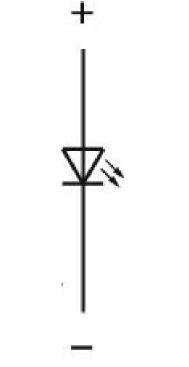

#### **Component layouts:**

(A) (B) 9 x 9 mm 19 x 19 mm 9 x 14 mm 09 mm 019 x 19 mm 019 x 19 mm (19 x 19 mm 019 x 19 mm (19 x 19 mm) (19 x 19 mm A = Terminals (rear side) B = Indicator

#### Mounting cut-outs:



#### **Dimension drawings:**

