

Actuator

45-
2T07.4FH0.000

Distribution by
Newark



<https://newark.eao.com/component/45-2T07.4FH0...>

Your product:



45-2T07.4FH0.000 Actuator

Loading . .

FRONT

Front dimension:	Ø 38 mm
Front form:	Round
Front bezel colour:	Sand grey
Front bezel material:	Metal

MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens cap colour:	Green
Lens cap material:	Plastic
Lens cap shape:	flush
Lens cap optical effect:	transparent
Illumination colour:	Green

MECHANICAL CHARACTERISTICS

Weight:	0.08 kg
----------------	---------

AMBIENT CONDITION

IP front protection:	IP66, IP67, IP69K
-----------------------------	-------------------

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 2 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 38 mm, Round, Sand grey, Metal, IP66, IP67, IP69K, Green

Housing material: Metal

Hints: Front panel thickness 1 ... 6 mm

Wiring diagrams:

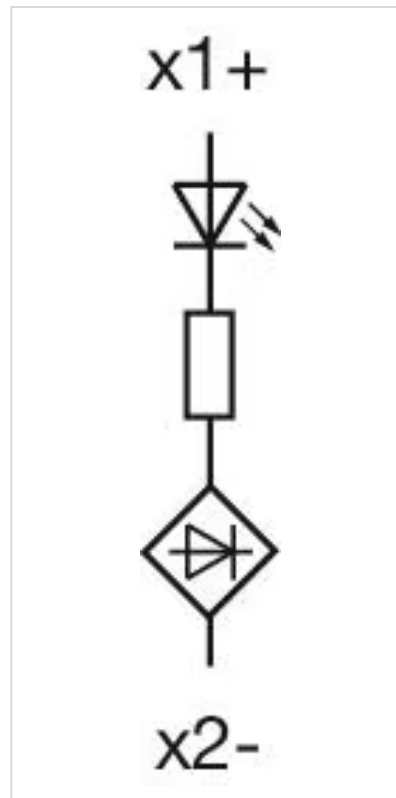

Dimension drawings:

