


Illumination element

Distribution by Newark



45-320.1H42

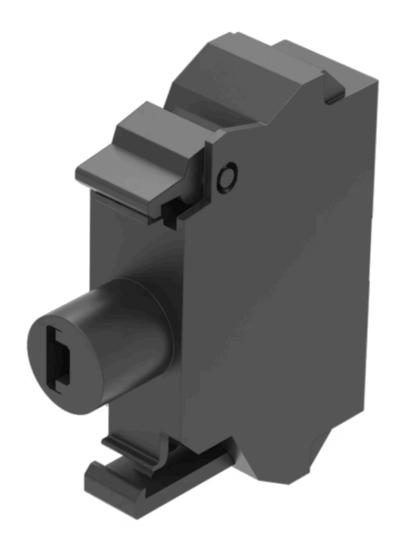





45-320.1H42 Illumination element

М	0	Ш	M.	П	N	G
IVI	v	u	IV.		14	v

Component mounting type: Front mounting

OPERATING-/INDICATION PART

Illumination colour: Green

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 - 240 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 900 - 1400 mcd

MECHANICAL CHARACTERISTICS

Terminal: Spring-type terminal

Terminal details 1: Solid 2 x (0.25 ... 1.5mm²)

Finely stranded

- Without end sleeves 2 x (0.5 \dots 1.5 mm²) - With end sleeves 2 x (0.5 \dots 0.75 mm²)

- For AWG cables for auxiliary contacts 2 x (24 ... 16)

Weight: 0.01 kg

CERTIFICATE

REACH: REACH compliant


RoHS: RoHS compliant

OTHER

Short Description:

Illumination element, Spring-type terminal, Green, 24 - 240 V AC/DC, Front mounting

Wiring diagrams:

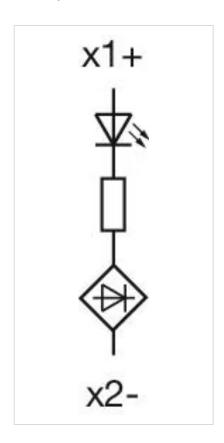

Dimension drawings:

