


Your Expert Partner for Human Machine Interfaces

# Illumination element

Distribution by Newark Newark

45-320.1H42

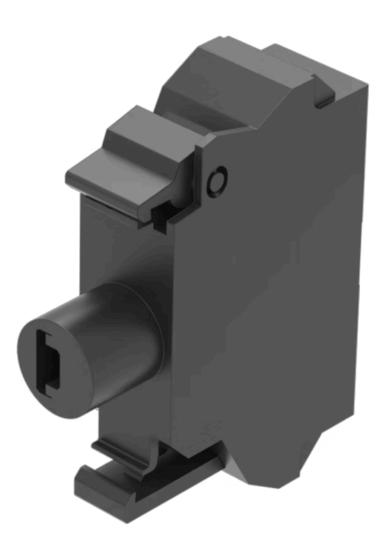



https://newark.eao.com/p/45-320.1H42

### Your product:



## 45-320.1H42 Illumination element

MOUNTING	
Component mounting type:	Front mounting
<b>OPERATING-/INDICATION PART</b>	
Illumination colour:	Green
ELECTRICAL CHARACTERISTICS	
Operating voltage:	24 - 240 V AC/DC
Surge voltage resistance:	4 kV
Lumi. Intensity:	900 - 1400 mcd

#### MECHANICAL CHARACTERISTICS

Terminal:	Spring-type terminal
Terminal details 1:	Solid 2 x (0.25 1.5mm <sup>2</sup> ) Finely stranded – Without end sleeves 2 x (0.5 1.5 mm <sup>2</sup> ) – With end sleeves 2 x (0.5 0.75 mm <sup>2</sup> ) – For AWG cables for auxiliary contacts 2 x (24 16)
Weight:	0.01 kg

#### CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

#### Short Description:

Illumination element, Spring-type terminal, Green, 24 - 240 V AC/DC, Front mounting

#### Wiring diagrams:

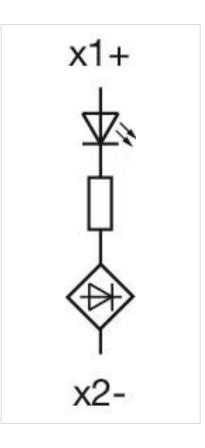

Dimension drawings:

