


# Switching element - discontinued item

704.900.3

Distribution by  
Newark

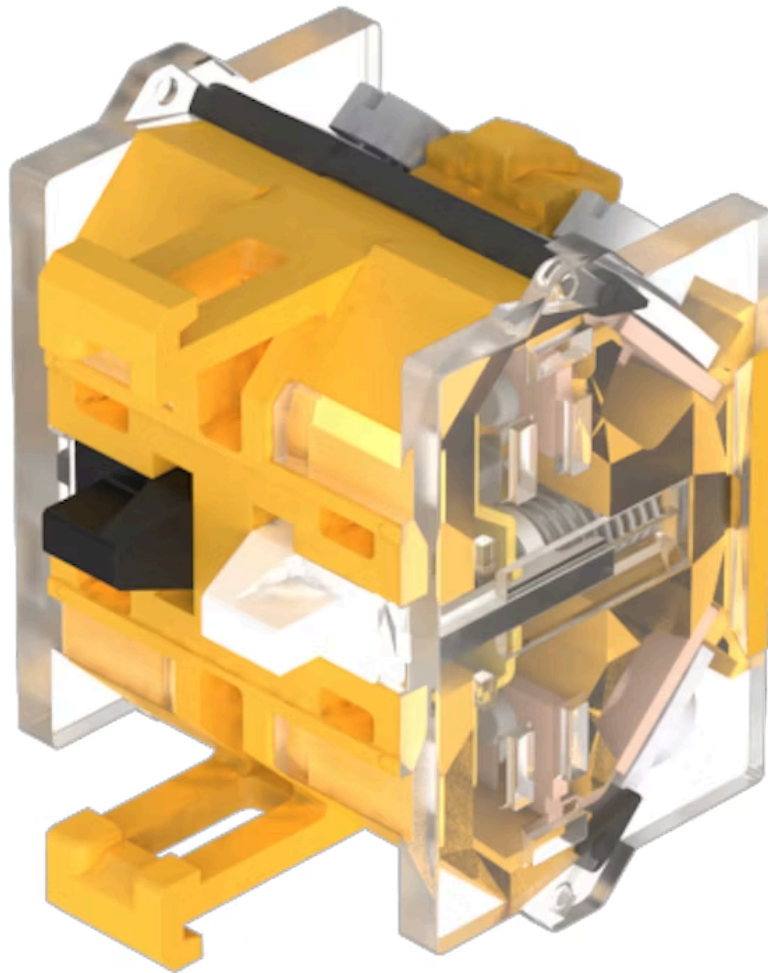

<https://newark.eao.com/component/704.900.3/en...>

Your product:



704.900.3

Switching element - discontinued item

*Loading ...*

### PRODUCT RANGE

**Product Status:**

Phase-out

**successor product:**

<https://www.eao.com/c/704.900.3-1>

### ELECTRICAL CHARACTERISTICS

**Switching voltage and switching current:**

|                             |  |                    |       |
|-----------------------------|--|--------------------|-------|
| as per DIN EN IEC 60947-5-1 |  |                    |       |
| voltage                     |  | DC13               | AC15  |
| 24 V                        |  | 2,5 A              |       |
| 60 V                        |  | 0,8 A              |       |
| 110 V                       |  | 0,6 A              |       |
| 120 V                       |  |                    | 4,5 A |
| 230 V                       |  | 0,2 A              | 4,5 A |
| 400 V                       |  | 0,15 A             | 4,0 A |
| 500 V                       |  | 0,7 A              | 2,5 A |
| as per UL 60947-5-1         |  |                    |       |
| voltage                     |  | power              |       |
| 24 VDC                      |  | 2,5 A, Pilot duty  |       |
| 60 VDC                      |  | 0,8 A, Pilot duty  |       |
| 120 VDC                     |  | 0,6 A, Pilot duty  |       |
| 240 VDC                     |  | 0,2 A, Pilot duty  |       |
| 415 VDC                     |  | 0,15 A, Pilot duty |       |
| 480 VDC                     |  | 0,07A, Pilot duty  |       |
| 120 VAC                     |  | 4,5 A, Pilot duty  |       |
| 240 VAC                     |  | 4,5 A, Pilot duty  |       |
| 415 VAC                     |  | 4,0 A, Pilot duty  |       |
| 480 VAC                     |  | 2,5 A, Pilot duty  |       |

For voltages greater than  $U_e = 400$  V,  
the grid dimensions must not be  
less than 35 mm x 50 mm.

**Contacts:**

2 NO

**Forward voltage:**

**Rated impulse withstand voltage  
 $U_{imp}$ :**

4 kV, according to EN/IEC 60947-5-1

**Rated insulation voltage  $U_i$ :**

500 V

**Recommended minimum  
operational data:**

|                      |        |         |         |
|----------------------|--------|---------|---------|
| Gold-silver contacts |        |         |         |
| Voltage              | 5 VDC  | 24 VDC  | 110 VDC |
| Current              | 15 mA  | 5 mA    | 2 mA    |
| Hard silver contacts |        |         |         |
| Voltage              | 24 VDC | 110 VDC |         |
| Current              | 50 mA  | 10 mA   |         |

|  |  |
|--|--|
| <b>Switching rating:</b>               | 500 V AC @ 10 A  |
| <b>Electrical lifetime:</b>            | 50 000 cycles of operation   |
| <b>Pollution degree:</b>               | 3  |
| <b>Standards:</b>                      | The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1                              |
| <b>Thermal current I<sub>th</sub>:</b> | 10 A Max. permissible current for continuous operation and ambient temperatures not exceeding the specified max. values. |

## MECHANICAL CHARACTERISTICS

|                            |  |
|----------------------------|--|
| <b>Terminal:</b>           | Screw terminal   |
| <b>Contact material:</b>   | Silver   |
| <b>Switching system:</b>   | Snap-action switching element  |
| <b>Switching system:</b>   | The double-break, snap-action switching element is equipped with one or two independent contact systems, acting as normally open or normally closed contact. The snap-action switching element is fitted with self-cleaning contacts.                                      |
| <b>Operating force:</b>    | 1 Normally closed approx. 1.9 N, 1 Normally open approx. 2 N   |
| <b>Tightening torque:</b>  | Screw terminal 0.5 Nm  |
| <b>Wire cross section:</b> | Max. wire cross-section 2 mm x 2.5 mm <sup>2</sup><br>Skinning wire 10 mm<br>Max. wire cross-section of stranded cable 2 x 1.5 mm <sup>2</sup><br>use stranded wires only with wire end ferrules of 10 mm length<br>Only one polarity is allowed on each side when wiring. |
| <b>Weight:</b>             | 0.029 kg   |

## AMBIENT CONDITION

|                               |  |
|-------------------------------|--|
| <b>IP Protection:</b>         | IP00   |
| <b>Operating temperature:</b> | - 40 °C ... + 55 °C  |
| <b>Storage temperature:</b>   | - 40 °C ... + 85 °C  |
| <b>Shock resistance:</b>      | 300 m/s <sup>2</sup> , pulse width 11 ms, 3-axis, (single impacts, semi-sinusoidal as per DIN EN 60068-2-27) |
| <b>Vibration resistance:</b>  | 100 m/s <sup>2</sup> at 10 Hz ... 500 Hz, amplitude 0.75 mm, (sinusoidal according to DIN EN 60068-2-6)      |
| <b>Climate resistance:</b>    | Relative humidity, max. 95%, non-condensing  |

## CERTIFICATE

|                      |   |
|----------------------|---|
| <b>Approbations:</b> | CB (IEC 60947-5-1), cULus, DNV, EAC, NFF, VDE |
| <b>Conformities:</b> | CE, CCC, UKCA                                 |

**REACH:** REACH compliant


**RoHS:** RoHS compliant

**OTHER**


**Short Description:** Switching element - discontinued item, Snap-action switching element, 500 V AC @ 10 A, Silver, 2 NO, Screw terminal

**Hints:** When using the switching element, the application guidelines must be observed. For the third switching element the terminal marking insert is to be ordered separately  
Operating temperature: Other temperatures on request

**Wiring diagrams:**

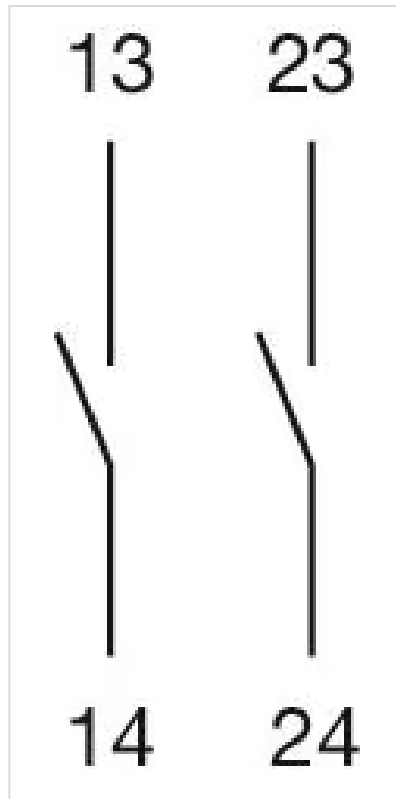

**Dimension drawings:**

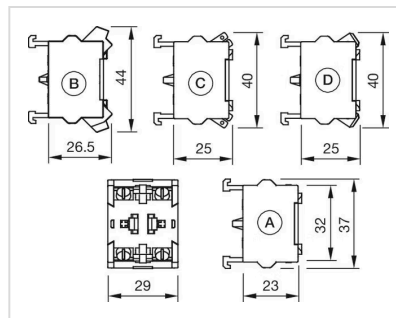

- A = Screw terminal
- B = Push-in terminal (PIT)
- C = Plug-in terminal 6.3 mm x 0.8 mm
- D = Double plug-in terminal 6.3 mm x 0.8 mm