


# Switching element

71-672.026

Distribution by  
Newark

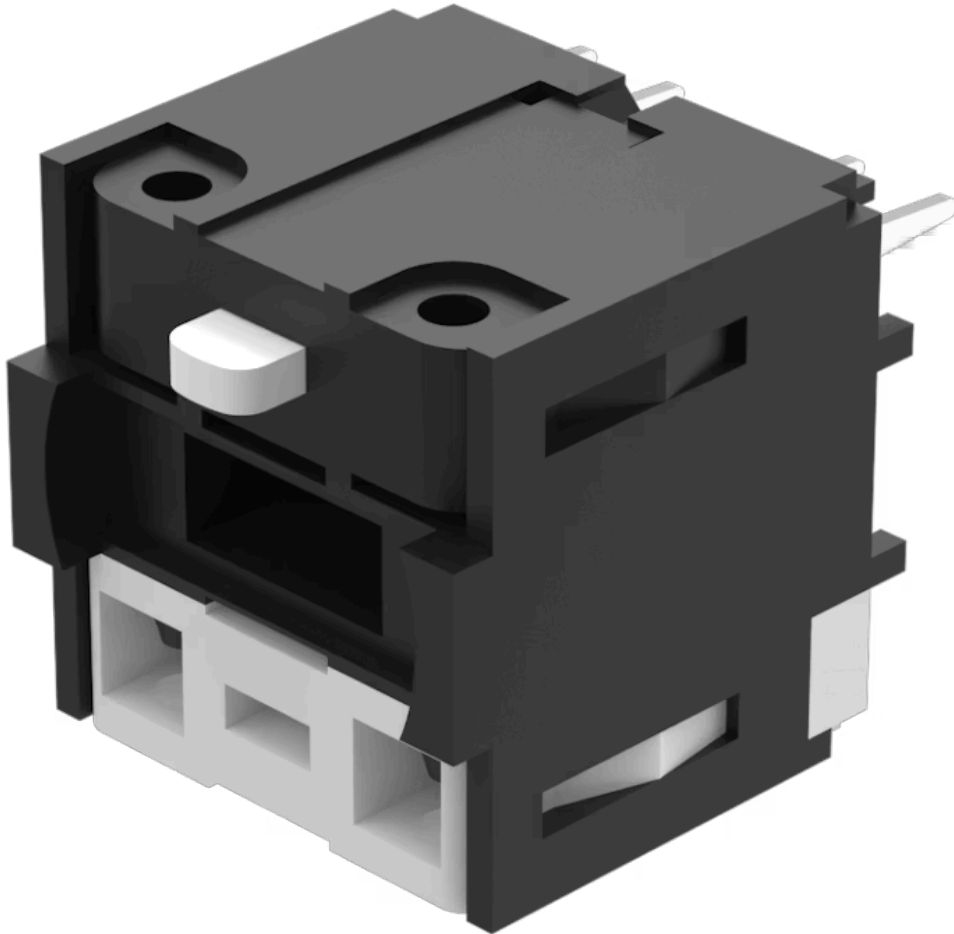

<https://newark.eao.com/component/71-672.026/e...>

Your product:

---



## 71-672.026 Switching element

*Loading ...*

### ELECTRICAL CHARACTERISTICS

**Contacts:** 2 NC / 2 NO

**Switching rating:** 250 V @ 3 A

### MECHANICAL CHARACTERISTICS

**Terminal:** PCB terminal

**Contact material:** Gold

**Switching system:** Snap-action switching element

**Switching positions:** 3 positions

**Weight:** 0.003 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER


**Short Description:** Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 2 NC / 2 NO, PCB terminal

**Housing material:** Plastic, according to UL 94 V0


**Product attributes:** Including locking pin

**Hints:** Including locking pin

**Wiring diagrams:**

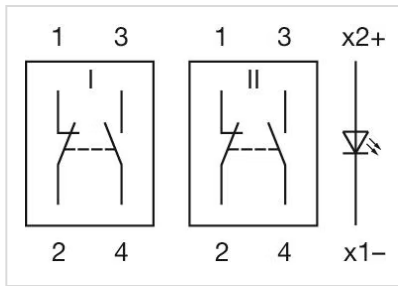

**Component layouts:**

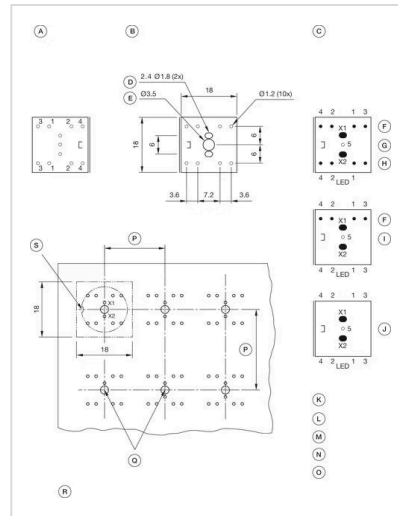

- A = Terminals (rear side)
- B = Drilling plan (component side)
- C = non-metallic
- D = Cu-Pad
- E = Occupancy plan (component side)
- F = 1. Switch
- G = Switching element 2 Normally close + 2 Normally open, Part No. 71-672.026
- H = 2. Switches
- I = Switching element 1 Normally close + 1 Normally open, Part No. 71-671.026
- J = Illumination element, Part No. 71-670.026
- K = X1 Lamp cathode (-)
- L = X2 Lamp anode (+)
- M = 1-2 Contact normally closed
- N = 3-4 Contact normally open
- O = 5 Hole for interlocking pin
- P = Front dimension min.
- Q = Position interlocking pin
- R = Note:  
Pitch of the print circuit board hole  $\varnothing 3.5$  must agree with the mounting holes on the front plate
- S = Slot in actuator