

Smart-Box, white, 2 switches configurable

73-00001.1

Distribution by
Newark



<https://newark.eao.com/component/73-00001.1/e...>

Your product:



73-00001.1 Smart-Box, white, 2 switches configurable

Loading . . .

MOUNTING

Mounting type: for snapping in place

OPERATING-/INDICATION PART

Illumination colour: White

ELECTRICAL CHARACTERISTICS

Contacts: 2 NO

Operating voltage: 24 V DC $\pm 10\%$

Operation current: 10 mA

Switching rating: 30 V DC @ 0,1 A

Communication interface: Standard

MECHANICAL CHARACTERISTICS

Terminal:	Connector M12
Contact material:	Gold-plated silver
Switching system:	Short-travel element
Switching system:	Short-travel snap-action switching system with two independent contact points and tactile operation Guarantees reliable switching even of very light loads. Fitted with 1 normally open contact
Mechanical lifetime:	≥1 Mil. cycles of operation
Operating force:	4.5 N ±1 N (measured at the lens)
Operating Travel:	ca. 0.5 mm
Weight:	0.001 kg

AMBIENT CONDITION

IP Protection:	IP67
Operating temperature:	- 25 °C ... + 60 °C
Storage temperature:	- 25 °C ... + 80 °C
Shock resistance:	Max. 100 m / s ² , pulse width, 3-axis (sinusoidal EN IEC 60068-2-27)
Vibration resistance:	Max. 50 m / s ² from 10 Hz ... 500 Hz, 10 cycles, 3-axis (sinusoidal EN IEC 60068-2-6)

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER


Short Description:	Smart-Box, white, 2 switches configurable, 30 V DC @ 0,1 A, 24 V DC ±10 %, 2 NO, Connector M12, White
Dimension:	110.9 mm x 45 mm x 45.7 mm
Material:	Plastic, according to UL 94 V0
Hints:	Mount the mounting adaptor on the mounting surface. Hang the Smart-Box on one side (note the orientation of the mounting adaptor on the housing). Press the Smart-Box onto the adaptor on the opposite side until the box clicks into place. Alternatively, the module can be placed on a standard top-hat rail or mounted on a surface using screws from the rear (see dimension drawings).
Description component:	Upper part of housing: PBT / UL-V0 / colour similar to RAL9010; Lower part of housing: PBT / UL-V0 / colour similar to RAL9011; Spring element (for restraint): POM (nature); Seal: MVQ silicone foam bright; Blind plug: PC / glass clear; Mounting adaptor: Stainless steel 1.4301 / surface vibratory finish; Housing

screws: Stainless steel A2; Marking plate: Black PVC / surface aluminium-coloured, adhesive; M12 connector housing: Die cast zinc

Colour RAL:

9010 RAL

Wiring diagrams:

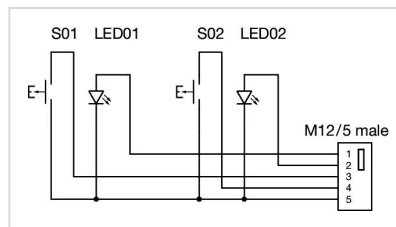

Dimension drawings:

