

Actuator

45-
2630.19E0.000

Distribution by
Newark



<https://newark.eao.com/p/45-2630.19E0.000>

Your product:



45-2630.19E0.000 Actuator

FRONT

| | |
|-----------------------|---------|
| Front dimension: | Ø 40 mm |
| Front form: | Round |
| Front bezel colour: | Black |
| Front bezel material: | Plastic |

MOUNTING

| | |
|-------------------|----------------|
| Design: | Raised |
| Mounting cut-out: | Ø 22.3 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|--------------------|---------------|
| Lens colour: | Red |
| Lens material: | Plastic |
| Lens illumination: | Illuminated |
| Lens shape: | Mushroom-head |
| Lens optics: | transparent |

MECHANICAL CHARACTERISTICS

| | |
|----------------------|-----------------------------|
| Switching action: | Maintained |
| Switching system: | Slow-make switching element |
| Release type: | Pull unlock |
| Mechanical lifetime: | 500 000 cycles of operation |

Operating frequency: Max. 1 800/h

Weight: 0.028 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 40 mm, Mushroom-head, Illuminated, Red, Plastic, transparent, Round, Black, Plastic, Maintained, IP66, IP67, IP69K, Pull unlock

Housing colour: Black

Housing material: Plastic

Wiring diagrams:

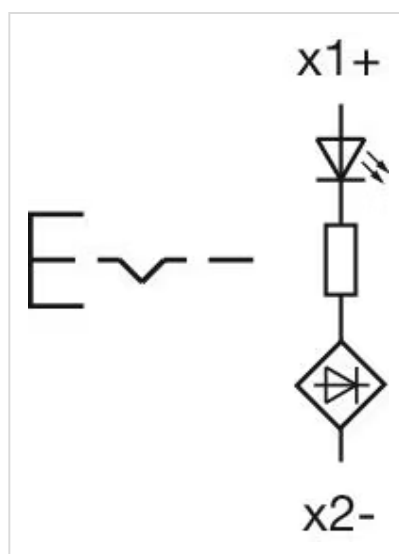

Mounting cut-outs:



Dimension drawings:

