

Actuator

45-
2630.19E0.000

Distribution by
Newark



<https://newark.eao.com/p/45-2630.19E0.000>

Your product:



45-2630.19E0.000

Actuator

FRONT

Front dimension: Ø 40 mm

Front form: Round

Front bezel colour: Black

Front bezel material: Plastic

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Red

Lens material: Plastic

Lens illumination: Illuminated

Lens shape: Mushroom-head

Lens optics: transparent

ELECTRICAL CHARACTERISTICS

Switching rating:

MECHANICAL CHARACTERISTIC

Switching action: Maintained

Switching system:	Slow-make switching element
Release type:	Pull unlock
Mechanical lifetime:	500 000 cycles of operation
Operating frequency:	Max. 1 800/h
Weight:	0.028 kg

AMBIENT CONDITION


IP front protection:	IP66, IP67, IP69K
Operating temperature:	– 25 °C ... + 70 °C
Storage temperature:	– 40 °C ... + 80 °C
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance:	According to IEC 60068-2-6: 20 ... 500 Hz: 5 g
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Actuator, Ø 22.3 mm, Ø 40 mm, Mushroom-head, Illuminated, Red, Plastic, transparent, Round, Black, Plastic, Maintained, IP66, IP67, IP69K, Pull unlock
Housing colour:	Black
Housing material:	Plastic
Wiring diagrams:	

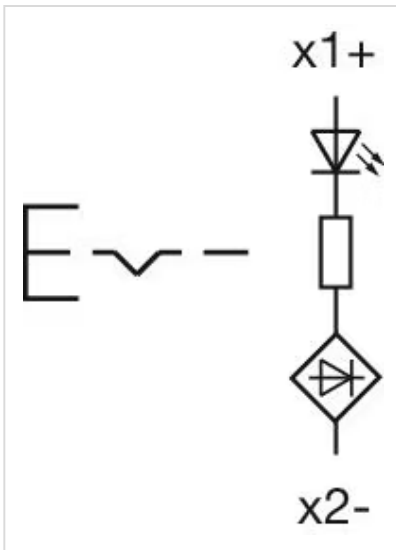

Mounting cut-outs:

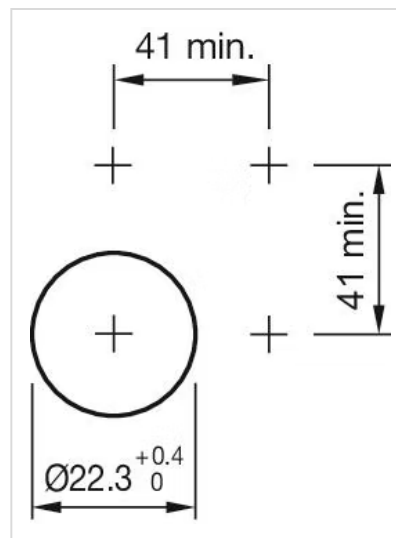

Dimension drawings:

